




TYPE S

HIGH PRESSURE FLOWMETERS

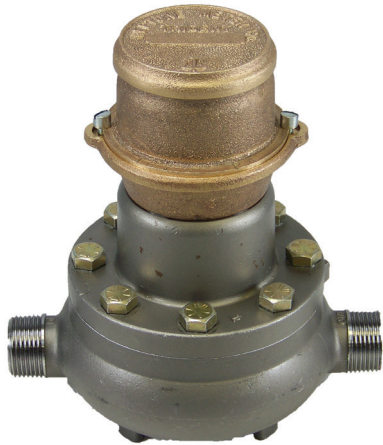

**5/8" x 1" Type S/HP with
Model 157 Register
(up to 5000 psi)**

- **Heavy Duty Design Withstands High Pressure**
- **Standard NPT Fittings For Easy Installation**
- **Positive-Displacement Disc Principle**
- **Change Gears For Positive Calibration**
- **Accuracy of 100% \pm 1.0%**
- **Repeatability of 100% \pm 0.1% of Rate**
- **Minimal Maintenance**
- **Compact design**

DESCRIPTION

Red Seal Type S Nutating Disc High Pressure (HP) Flowmeters are precision-constructed measuring instruments used for accurate measurement of liquids at high pressures. The 5/8" x 1" Type S/HP measures liquids at pressures up to 345 bar (5000 psi).

DESIGN FEATURES

The nutating disc positive displacement measuring chamber is accurate and dependable with a standard accuracy of 100% \pm 1.0% and repeatability of 100% \pm 0.1% of rate.

The double case design of Type S/HP flowmeters allow liquid to surround the measuring chamber at line pressure. Therefore, the measuring chamber is not subjected to pressure distortion which is the major source of flowmeter damage. Installation of Type S/HP flowmeters may be in any position or location in either an existing or a new system, downstream from the pump.

FLEXIBILITY

Type S/HP Flowmeters are used in diverse operations from monitoring water injection at water flood input wells

for secondary oil recovery to determining the usage of costly printing inks as ink is pumped through pipes to the press fountains. The rugged corrosion resistant steel outer body and cover, with durable bronze gear train and measuring chamber, allow the 5/8" x 1" Type S/HP to additionally handle a wide variety of mild acidic, erosive, petroleum and other high viscosity liquids. Other uses of the 5/8" x 1" Type S/HP include high viscosity thixotropic printing inks at 135 - 345 bars (2000 - 5000 psi) and high viscosity greases and lubricants. The 5/8" x 1" Type S/HP flowmeters are universally accepted for precise ink measurement in heat set and web fed offset color printing presses for quality control and billing operations.

LONG SERVICE LIFE

The rugged construction of Type S/HP flowmeters assures simple, economical and low maintenance.

POSITIVE AND ACCURATE REGISTRATION

Positive adjustment through calibration (change) gears eliminate errors caused by vibration, liquid shock and weather conditions, and reduce the potential for tampering. Due to the nature of higher viscosity liquids, the minimum operating range may be reduced by 75% or more.

SIMPLE DESIGN

The Red Seal Type S/HP flowmeter is both simple in design and easy to service. Normal maintenance can be accomplished in less than 10 minutes. In addition, the inlet and outlet connections (spuds) are machined to 1" NPT for use with commercially available high pressure couplings.

ACCESSORIES

A simple, direct-reading totalizer register (Model 157) with easy-to-read numerals provides a convenient means of checking the quantity delivered. In addition, an adapter can be added to incorporate a pulse transmitter for remote batching or totalization.


ACCURACY

5/8" x 1" Type S/HP Flowmeter:


- Low viscosity range (0.5-3000 cPs): 100% \pm 1.0% of rate, based on a 10:1 turndown. Q max 76 LPM (20 US GPM) to Q min 7.6 LPM (2 US GPM). For specific ranges with increased viscosity and reduced variables, accuracies of 100% \pm 0.5% are obtainable with field calibration.
- High viscosity range (3000 cPs and above) first, Q max and Q min are reduced by 75%: 19.0 to 0.95 LPM (5.0-0.25 US GPM). Standard accuracy is 100% \pm 1.0% of rate. Enhanced accuracies are not addressed due to unpredictable variables in many thixotropic liquids and viscosity changes.
- Repeatability is 100% \pm 0.1% of rate.

PRESSURE LOSS CURVES FOR WATER

5/8" X 1" TYPE S/HP

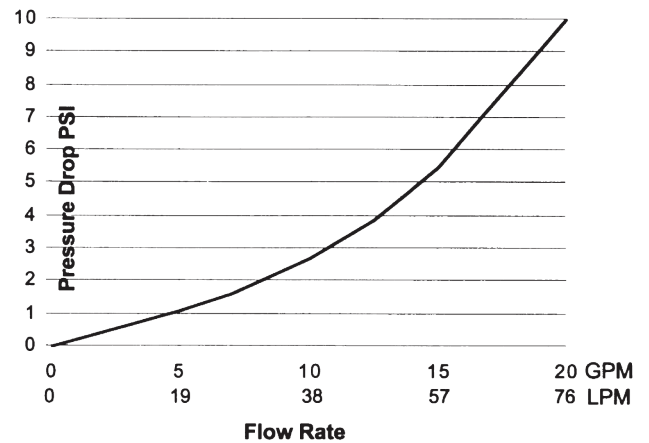

TYPICAL INSTALLATION

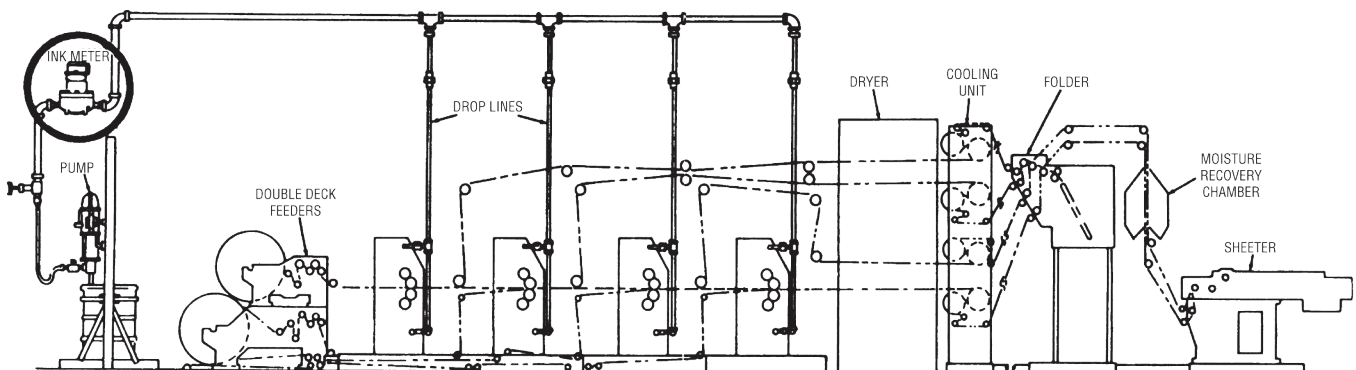


FLOWMETER OPERATING SPECIFICATIONS


| CATEGORY | | 5/8" x 1" TYPE S/HP FLOWMETER |
|----------------|--|---|
| METER | Type of Measuring Element | Double Case Nutating Disc |
| | Size of Element | 80.54 cc (4.91 in ³) |
| | End Connections a. Threaded b. Flanged | 1" External NPT Not Applicable |
| | Temperature Rating (T Max) | 121°C (250°F) |
| | Pressure Ratings P Max P Min | 345 bar (5000 psi) @ 121°C Dependent upon through-put and viscosity |
| | Flow Range (Q Max) (Q Min) | Below 3000 cPs: 76 LPM (20 GPM) Above 3000 cPs: 19 LPM (5 GPM) Below 3000 cPs: 7.6 LPM (2 GPM) Above 3000 cPs: .95 LPM (.25 GPM) |
| | Totalized Units (min) | 1 Gallon or 10 Litres, 10 Kilograms or 10 Pounds |
| | Enclosure Class | Totally mechanical. If interfaced with a pulse transmitter, the rating of the device applies. |
| | Power Supply | None, unless fitted with a pulse transmitter, then the rating of the installed device applies. |
| | Main Body Material | Corrosion Resistant Steel |
| | Main Body Cover Material | Corrosion Resistant Steel |
| | Disc Piston | Ryton |
| | Shaft Material | Stainless Steel |
| | Gasket Material | Buna-N |
| | Type of Coupling | Mechanical |
| | Register Type | Model 157 Totalizer |
| COUNTER | Totalizer | Model 157: 7 digits |
| | Reset | Not Applicable |
| | Capacity | Totalizer 9999999 |
| | Set-Stop | Not Applicable |
| | Flow Units | Only with pulse transmitter and BATCHMATE Batch Control Computer |
| | Shut-Off Valve | Not Applicable |
| | Switch a. Single Stage b. Double Stage | Not Applicable Not Applicable |
| OPTIONS | Transmitter Type | Model 35 and Model 35 HR (Consult TS-510) |
| | Transmitter Output | 10 or 100 pulses per gallon OR 1 or 10 pulses per litre, pound or kilo (See TS-510) |
| | Air Eliminator | Not Applicable |
| | Strainer Size & Mesh | Not Applicable |
| | Manufacturer | Red Seal Measurement |
| | Model Number | TSHP062-XXXX |

DIMENSIONAL DATA

5/8" x 1" Type S/HP with 157 Register

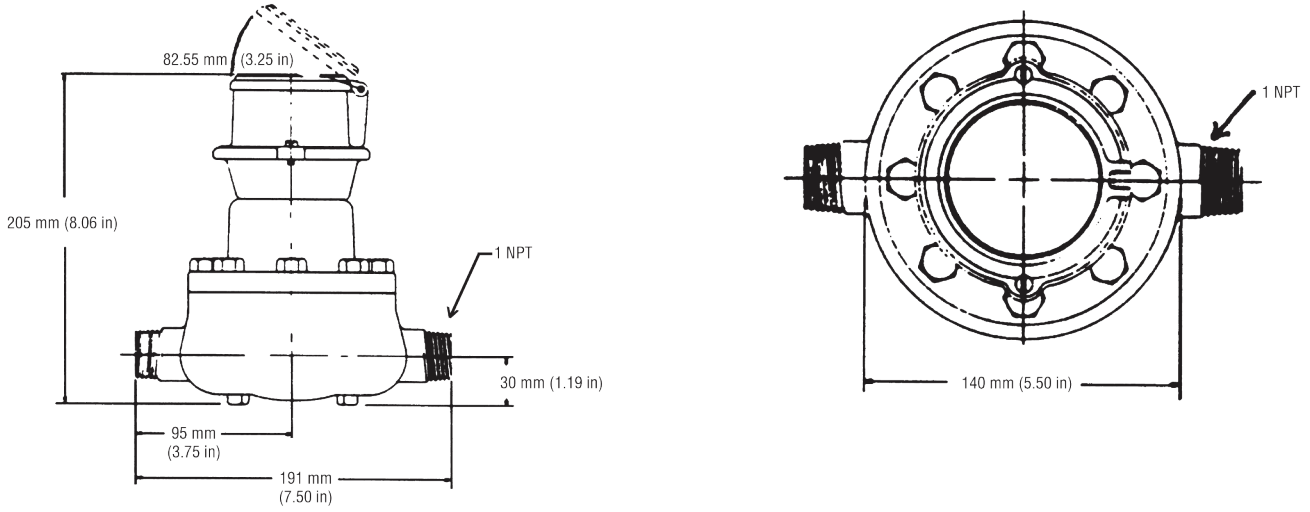

PULSE TRANSMITTER DIMENSIONS 157 Register Adapter with Model 35 or 35 HR Pulse Transmitters

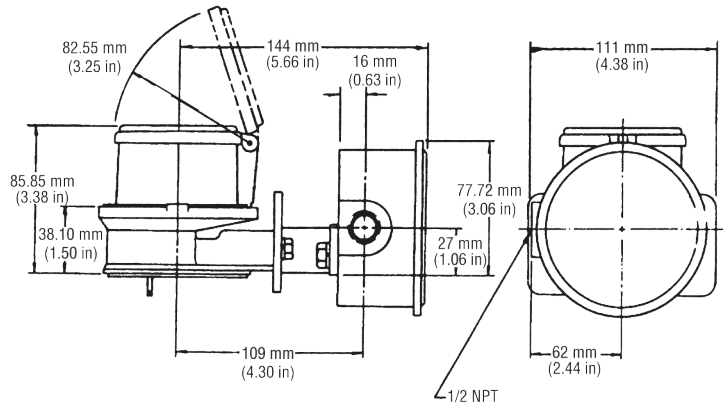

1310 Emerald Road
Greenwood, SC 29646
USA
Phone: 1.800.833.3357
Fax: 1.864.223.0341

